



Box Properties

--Description--

Name:

Type: Vented Box

Shape: Prism, square

--Box Parameters--

Vb = 1.181 cu.ft

V(total) = 1.311 cu.ft

Fb = 34.9 Hz

F3 = 31.04 Hz

Fill = none

--Vents--

No. of Vents = 1


Vent shape = rectangle

Vent ends = one flush

Hv = 1.5 in

Wv = 4 in

Lv = 10 in

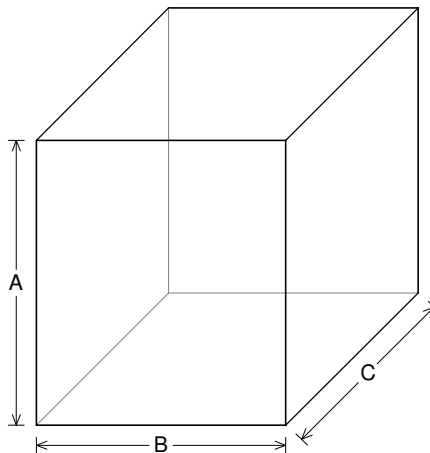

--External Dimensions--

A = 16 in

B = 14 in

C = 14 in

--Internal Dimensions--

A = 14.5 in

B = 12.5 in

C = 12.5 in

--Wall Thickness--

Front = 0.75 in

Side = 0.75 in

Driver Properties

--Description--

Name: REX 10 S4

Type: Standard one-way driver

Company: RE Audio (2015)

--Configuration--

No. of Drivers = 1

--Driver Parameters--

Fs = 24.35 Hz

Qms = 6.092

Vas = 2.021 cu.ft

Xmax = 0.6 in

Sd = 56.8 sq.in






Qes = 0.492

Re = 3.825 ohms

Le = 4.968 mH

Z = 4.59 ohms

Pe = 200 watts

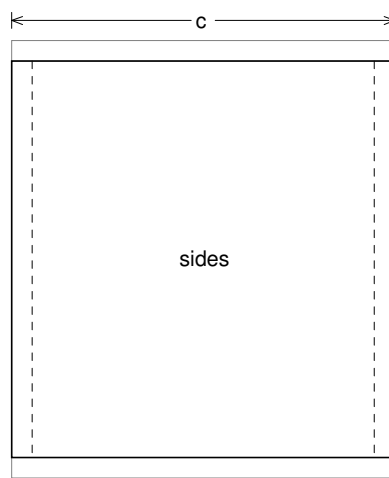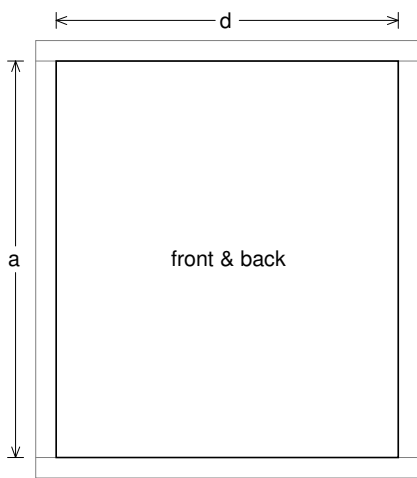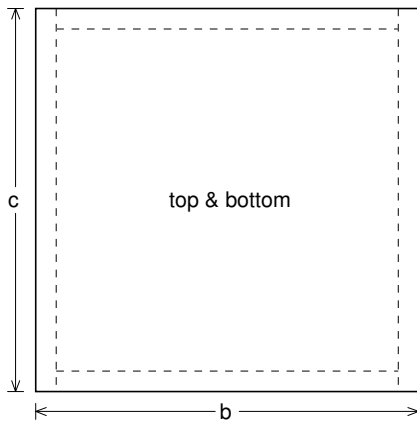

Box Parts

Box Shape: Square Prism

- 1 Top, 1 Bottom: depth (c) = 14 in
width (b) = 14, thickness = 0.75 in
- 1 Front, 1 Back: height (a) = 14.5 in
width (d) = 12.5, thickness = 0.75 in
- 2 Sides: height (a) = 14.5 in
depth (c) = 14, thickness = 0.75 in

--Driver Mounting--
Mounting: Front

--Vent Parts--

- 1 Top, 1 Bottom:
width (e) = 4, length (h) = 10 in
thickness = 0.75 in
- 2 Sides:
height (g) = 3, length (h) = 10 in
thickness = 0.75 in



Wiring Diagram

